

# LERE

## LED ELEVATED RUNWAY EDGE AND THRESHOLD/END LIGHT



### APPLICATIONS

Runway edge and threshold/end for ICAO CAT I / II / III, FAA and military runways.

### BENEFITS

- 60,000 hours LED rated life at full intensity, but over 100,000 hours in field operating conditions.
- In new installations, LED lights mean smaller loads, smaller CCRs and transformers, thus lower life cycle costs.
- Light output is variable like a traditional halogen lamp, as indicated by FAA "Engineering Briefing No.67".
- Colors are produced by LEDs: no colored filters ensures no energy losses and no color shifts.
- Fully compatible with existing AFL infrastructure\*.
- Designed with simplicity allowing longer maintenance intervals and fewer spare parts.
- Customized gasket for glass cover to avoid the use of sealing compound.
- No optical adjustment after LED module or prism replacement.
- Compatible with CCRs designed in compliance with IEC or FAA requirements.

\* For monitored fixtures, isolation transformer max size: 150 VA.

### COMPLIANCES

**FAA:** L-862-E(L) AC150/5345-46 and EB No.67  
**ICAO:** Annex 14 - Volume I Fig. A2-3, A2-8, A2-9, A2-10, par. 5.3.9.8 e 5.3.9.9  
**IEC:** TS 61827  
**NATO:** STANAG 3316  
**CAA:** CAP 168  
**TCCA:** TP312  
**EASA:** CS-ADR-DSN, Book 1, fig.U-13, U-14, U-7, U-12  
**CASA:** Manual of Standard Part 139



### TECHNICAL FEATURES

- Rugged electronics built tough for high resistance to shock and vibration.
- Power supply via series circuit (2.8 - 6.6 A).
- Automatic adaptation to the 50 or 60 Hz frequency of the supply current.
- Surge protection device is provided to protect the electronics as required by FAA "Engineering Briefing No.67".
- Continuous internal fault detection.
- Bidirectional runway edge lights include "Circular Guidance".
- Optional fixed brightness "Circular Guidance" for white and amber lights.
- Lightweight and sturdy due to aluminium die-castings.
- Powder coat finish provides durable corrosion resistance.
- Fixture leveling provided using four external screws.
- Smaller Profile improve jet blast resistance.
- IP67 protection.
- Temperature range: -55 °C (-67 °F) to +55 °C (131 °F).

### INSTALLATION

- Fixture can be installed on pipe elbow, stake or baseplate.
- Specific tools available for easy and precise installation.

## PHOTOMETRIC PERFORMANCE

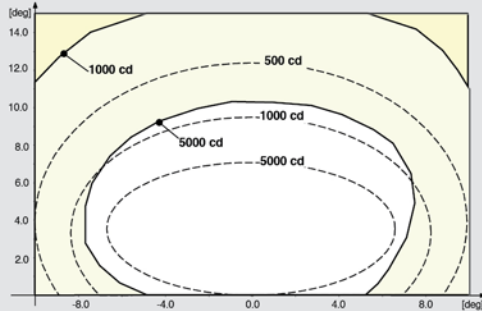


Figure 1 - ICAO Fig. A2-10 60 m – White

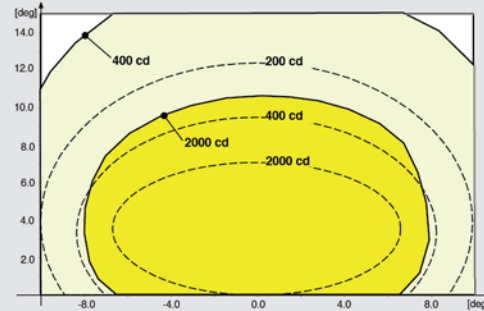


Figure 2 - ICAO Fig. A2-10 60 m – Yellow

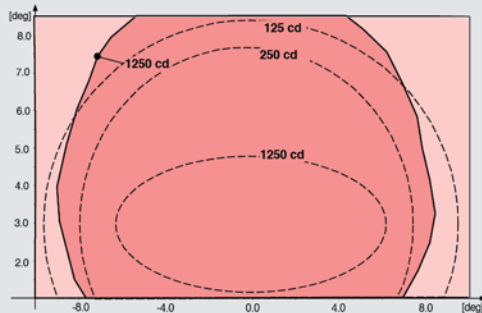


Figure 3 - ICAO Fig. A2-8 – Red

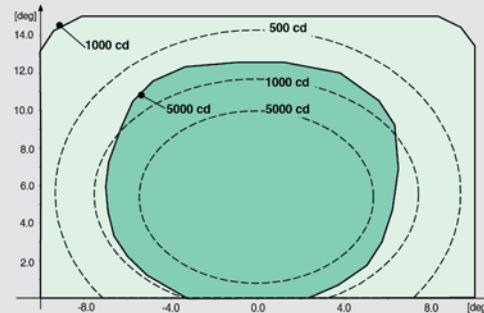


Figure 4 - ICAO Fig. A2-3 – Green

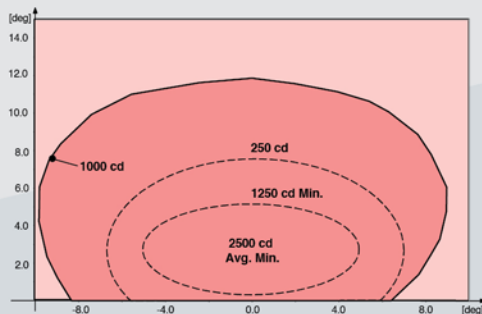


Figure 5 - FAA L-862E – Red

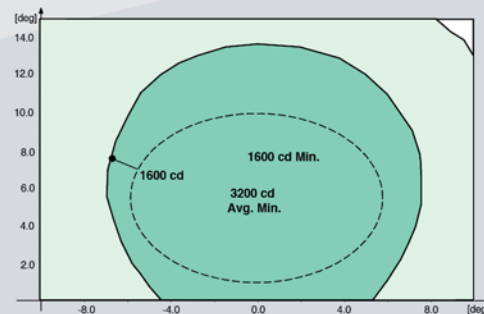


Figure 6 - FAA L-862E – Green

## POWER CONSUMPTION (maximum value among all fixture configurations)

Power Factor >0.98	Primary conductor isolation transformer		Fixture	
w/o Arctic kit	42.0 W	42.4 VA	31.7 W	32.1 VA
with Arctic kit	57.7 W	57.9 VA	50.1 W	50.4 VA

## TECHNICAL DRAWING




Figure 7 - Overall Dimensions

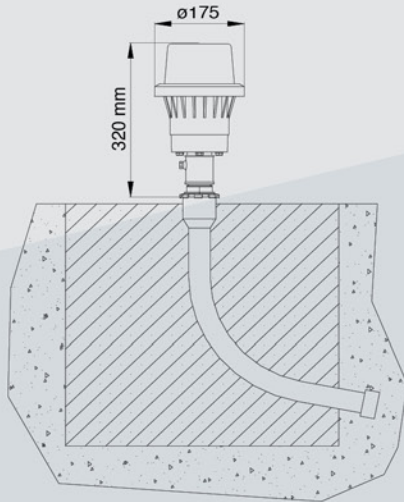


Figure 8 - Pipe Elbow

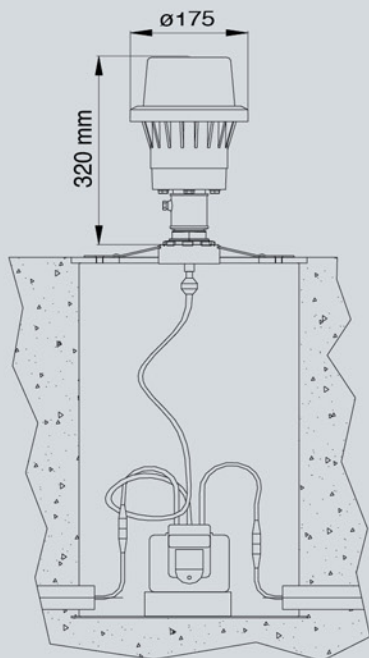


Figure 9 - FAA L-867 Deep Base and Base Plate

## PART NUMBER IDENTIFICATION

LERE - F - T - WR - 14 - C - M - A - CG

Basic P/N: \_\_\_\_\_

Compliance: \_\_\_\_\_

S = ICAO 45 m Runway edge and Threshold/Runway end

I = ICAO 60 m Runway edge

F = FAA

Use: \_\_\_\_\_

T = Threshold

E = Edge

Color (Side L / Side R)\*: \_\_\_\_\_

W = White

Y = Yellow

R = Red

G = Green (NO Runway edge ICAO)

Height: \_\_\_\_\_

00= Without pole (only I and S compliance)\*\*

14= 14" total height

20= 20" total height

24= 24" total height

30= 30" total height

Breakable coupling\*\*:

A = 1" 1/2 - 12 UNF (for 14" to 30" height)

B = 2" - 11 1/2 NPS (for 14" to 30" height)

C = 2" - 11 GAS\*\*\* (mandatory for 00" height)

D = 2" - 11 GAS\*\*\* (for 14" to 30" height)

Monitoring: \_\_\_\_\_

O = Without Monitoring

M = With Monitoring

Arctic Kit: \_\_\_\_\_

O = Without Arctic Kit

A = With Arctic Kit

Options: \_\_\_\_\_

CG= With circular guide component with fixed brightness (only W\* and Y\*\* colors)


(/) The beam aiming is not field adjustable

(\*\*) Breakable couplings mate with 1" EMT pole

(\*\*\*) Not define by FAA

(\*) White >30 cd of 2.8 A | >50 cd from 4.1 to 6.6 A

(\*\*) Yellow >15 cd of 2.8 A | >50 cd only 6.6 A

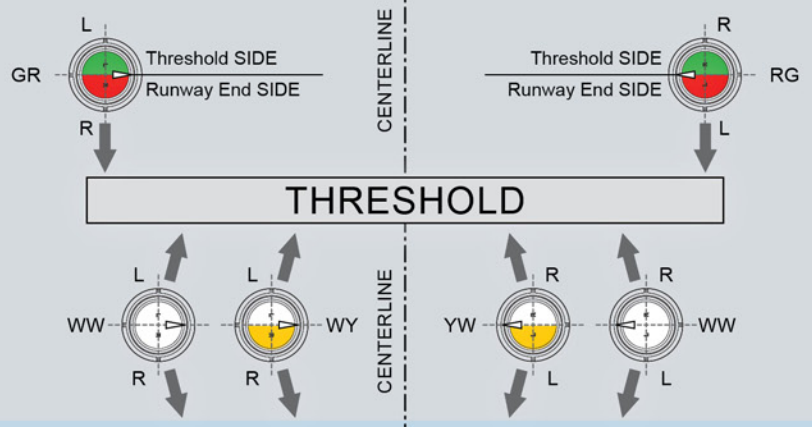

## RENEWAL PARTS FOR LIGHT UNIT

No.	Description	Qty
1	Clear outer cover.....	1
2	Gasket for glass cover.....	1
3	LED module .....	1-2
4	Lens array.....	1-2
5	Glass cover locking ring .....	1
6	Body with electronic and plug.....	1
7	Breakable coupling.....	1
8	Ring nut (ICAO versions) .....	1
9	FAA L-823 plug .....	1
10	Arctic kit (FAA version).....	1-2

**Refer to the relevant technical manual for the complete list of the available spare parts.**

## ACCESSORIES

013.0008	Galvanized steel pipe elbow with upper threaded end only (2" - 11 GAS thread).
315.3210	Galvanized steel pipe elbow with both threaded ends (2" - 11 GAS thread).
013.0010	Set of two ryton rings for receptacle support inside pipe elbow.
315.1228	Base L-867, Class IA, Size B, 24" Deep.
315.1062	Baseplate for L-867 base with gasket and cable clamp (2"-11 GAS thread).
315.1063	Baseplate for L-867 base with gasket and cable clamp (2" - 11 1/2 NPS thread).
315.1082	Baseplate for L-867 base with gasket and cable clamp (1 1/2 - 12 UNF thread).
332.4556	Levelling device.


Visit our website:



Get in touch:  
<https://multielectric.com/contact-us/>

We reserve the right to change the design or specification data without notice

## EXPLODED VIEW DRAWING

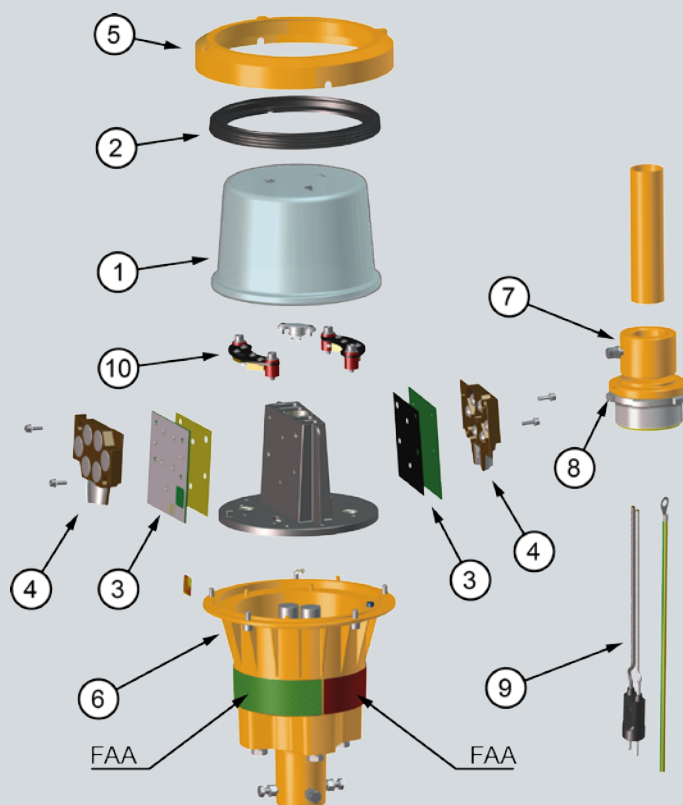

**For information about isolating transformers and connectors, please see the specific catalogue pages.**

## SHIPPING WEIGHTS AND VOLUMES

	Light unit
<b>Weight</b> [lbs (kg)]	11 (5.0)
<b>Volume</b> [ft <sup>3</sup> (m <sup>3</sup> )]	0.56 (0.016)

### Multi Electric Mfg., Inc.

10501 Franklin Avenue - Suite 400  
 Franklin Park, IL 60131 (USA)

Email: [sales@multielectric.com](mailto:sales@multielectric.com)  
 Phone: +1 773-722-1900  
 Fax: +1 773-722-5694

A company of ARETÈ COCCHI TECHNOLOGY

